

压敏电阻器-Q 系列(车规系列) 规格书

特点

- 电阻器工作电压范围从 82V 到 1000V。
- 工作温度：-40℃~ +125℃
- 储存温度：15℃~35℃
- 品质量符合 AEC-Q200 标准。
- 环氧树脂符合 UL94 V-0 阻燃等级要求（黄色包封）

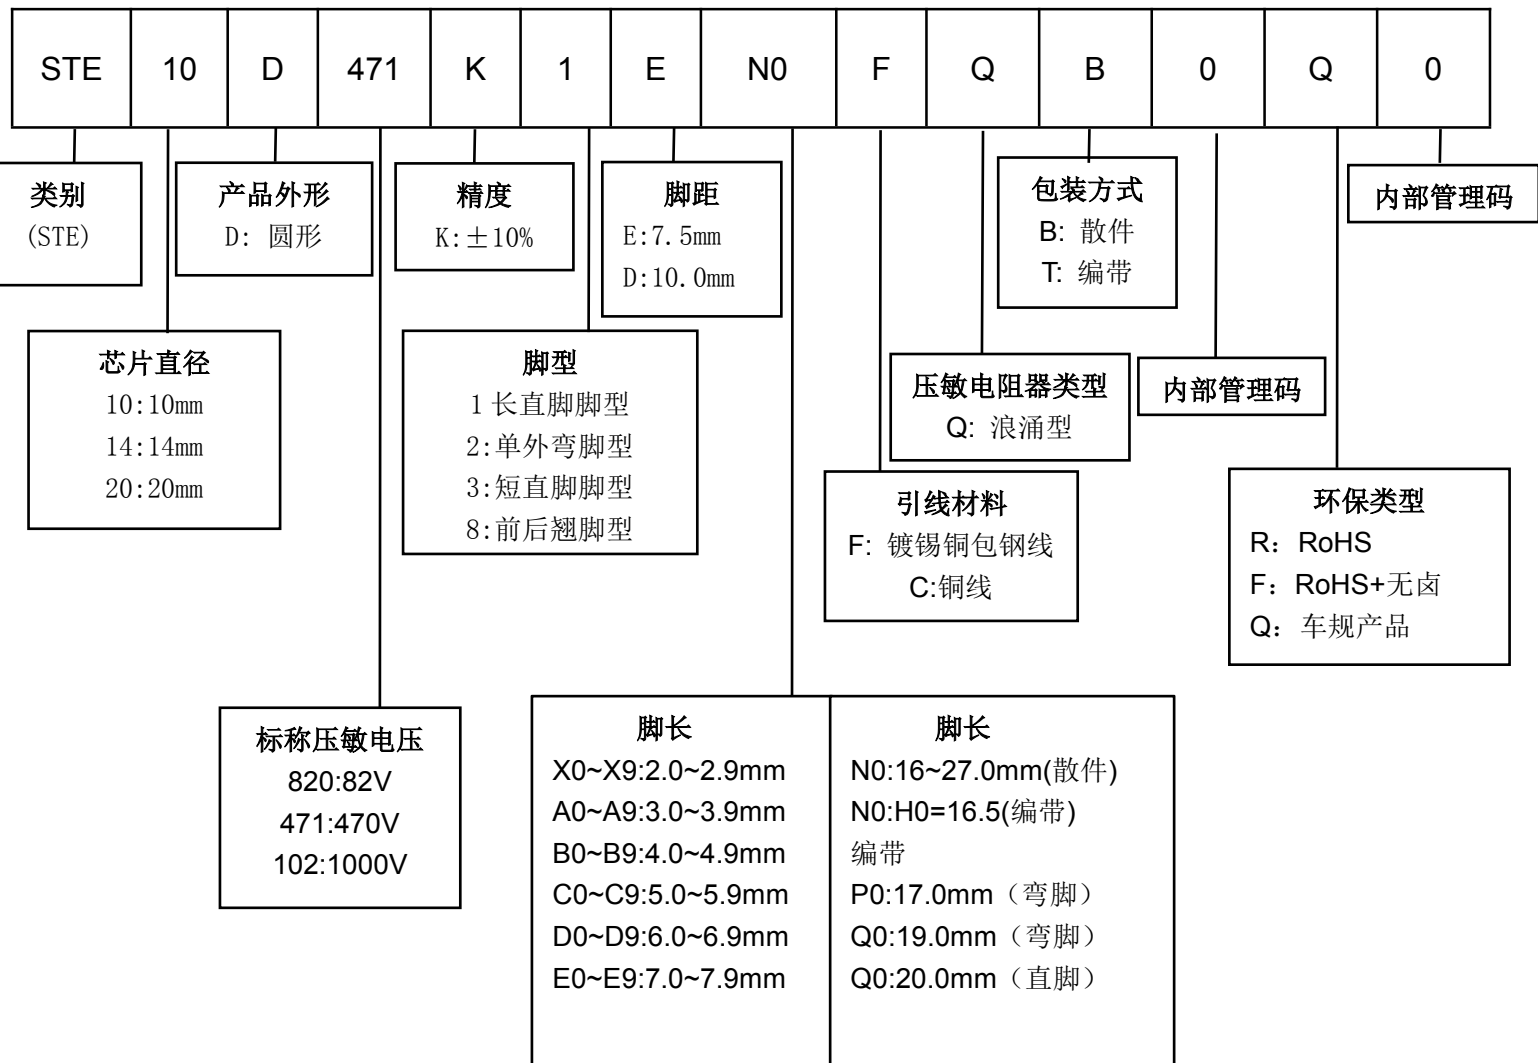
用途

- 信息娱乐和驱动接口（音/视频、收音机、照明）。
- 控制系统（雨刷、车灯等）。
- 汽车安全系统。
- 汽车动力总成系统（自动巡航控制、ECU、TCU、电池充电等）。
- 混合动力与电动汽车产品（BMS 等）。

安规认证

序号	安规标志		安规标准		证书号
1	中国		CQC	GB/T10193 GB/T10194 GB 4943.1-2022; IEC 61051-2:1991 +Amd1:2009	10D:CQC19001213188
					14D:CQC19001213191
					20D:CQC19001213192
2	美国/加拿大		UL/cUL	UL1449	E330837
3	德国		VDE	IEC61051 IEC60950-1:2013	40023049

料号编码原则



基本特性

10D-Q 系列

规格	最大连续 工作电压		压敏电压	最大 限制电压		最大峰值电流 (8/20μs)		最大能量 (10/1000μs)	额定 功率	静电容量 (参考值)
	AC _{rms} (V)	DC _{rms} (V)	V _{1mA} (V)	VC (V)	IP (A)	1 pulse (A)	2 pulse (A)	(J)	(W)	1KHz (pF)
STE-10D391KQ	250	320	390(351-429)	650	25	3500	2500	81.2	0.4	300
STE-10D431KQ	275	350	430(387-473)	710	25	3500	2500	68.2	0.4	270
STE-10D471KQ	300	385	470(423-517)	775	25	3500	2500	99.4	0.4	230
STE-10D511KQ	320	415	510(459-561)	845	25	3500	2500	99.4	0.4	210
STE-10D561KQ	350	460	560(504-616)	925	25	3500	2500	99.4	0.4	180
STE-10D621KQ	385	505	620(558-682)	1025	25	3500	2500	102.2	0.4	190
STE-10D681KQ	420	560	680(612-748)	1120	25	3500	2500	102.2	0.4	170
STE-10D751KQ	460	615	750(675-825)	1240	25	3500	2500	124.6	0.4	160
STE-10D821KQ	510	670	820(738-902)	1355	25	3500	2500	124.6	0.4	140
STE-10D911KQ	550	745	910(819-1001)	1500	25	3500	2500	133	0.4	120
STE-10D102KQ	625	825	1000(900-1100)	1650	25	3500	2500	133	0.4	110

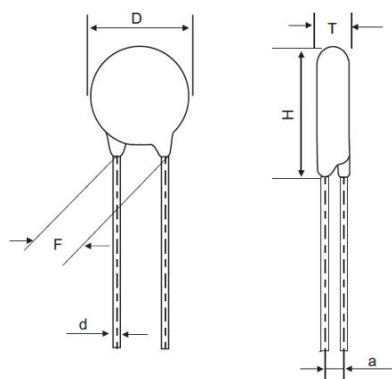
14D-Q 系列

规格	最大连续 工作电压		压敏电压 V_{1mA} (V)	最大 限制电压		最大峰值电流 (8/20 μ s)		最大能量 (10/1000 μ s)	额定 功率 (W)	静电容量 (参考值) 1KHz (pF)
	AC _{rms} (V)	DC _{rms} (V)		VC (V)	IP (A)	1 pulse (A)	2 pulse (A)	(J)		
STE-14D820KQ	50	65	82(74-90)	135	50	6000	4500	29.4	0.6	3700
STE-14D101KQ	60	85	100(90-110)	165	50	6000	4500	33.6	0.6	3200
STE-14D121KQ	75	100	120(108-132)	200	50	6000	4500	40.6	0.6	2700
STE-14D151KQ	95	125	150(135-165)	250	50	6000	4500	51.8	0.6	2200
STE-14D181KQ	115	150	180(162-198)	300	50	6000	4500	58.8	0.6	1100
STE-14D201KQ	130	170	200(180-220)	340	50	6000	4500	79.8	0.6	770
STE-14D221KQ	140	180	220(198-242)	360	50	6000	4500	79.8	0.6	740
STE-14D241KQ	150	200	240(216-264)	395	50	6000	4500	82.6	0.6	700
STE-14D271KQ	175	225	270(243-297)	455	50	6000	4500	93.8	0.6	640
STE-14D301KQ	190	250	300(270-330)	500	50	6000	4500	103.6	0.6	670
STE-14D331KQ	210	275	330(297-363)	550	50	6000	4500	112	0.6	580
STE-14D361KQ	230	300	360(324-396)	595	50	6000	4500	123.2	0.6	540
STE-14D391KQ	250	320	390(351-429)	650	50	6000	4500	134.4	0.6	500
STE-14D431KQ	275	350	430(387-473)	710	50	6000	4500	145.6	0.6	450
STE-14D471KQ	300	385	470(423-517)	775	50	6000	4500	149.8	0.6	400
STE-14D511KQ	320	415	510(459-561)	845	50	6000	4500	149.8	0.6	350
STE-14D561KQ	350	460	560(504-616)	925	50	6000	4500	149.8	0.6	360
STE-14D621KQ	385	505	620(558-682)	1025	50	6000	4500	168	0.6	330
STE-14D681KQ	420	560	680(612-748)	1120	50	6000	4500	168	0.6	320
STE-14D751KQ	460	615	750(675-825)	1240	50	6000	4500	203	0.6	310
STE-14D821KQ	510	670	820(738-902)	1355	50	6000	4500	203	0.6	280
STE-14D911KQ	550	745	910(819-1001)	1500	50	6000	4500	217	0.6	250
STE-14D102KQ	625	825	1000(900-1100)	1650	50	6000	4500	217	0.6	230

20D-Q 系列

规格	最大连续 工作电压		压敏电压	最大 限制电压		最大峰值电流 (8/20μs)		最大能量 (10/1000μs)	额定 功率	静电容量 (参考值)
	AC _{rms} (V)	DC _{rms} (V)	V _{1mA} (V)	VC (V)	IP (A)	1 pulse (A)	2 pulse (A)	(J)	(W)	1KHz (pF)
STE-20D820KQ	50	65	82(74-90)	135	100	10000	6500	37.8	1.0	7500
STE-20D101KQ	60	85	100(90-110)	165	100	10000	6500	42	1.0	6500
STE-20D121KQ	75	100	120(108-132)	200	100	10000	6500	56	1.0	5500
STE-20D151KQ	95	125	150(135-165)	250	100	10000	6500	70	1.0	4500
STE-20D181KQ	115	150	180(162-198)	300	100	10000	6500	84	1.0	2200
STE-20D201KQ	130	170	200(180-220)	340	100	10000	6500	98	1.0	1700
STE-20D221KQ	140	180	220(198-242)	360	100	10000	6500	105	1.0	1600
STE-20D241KQ	150	200	240(216-264)	395	100	10000	6500	112	1.0	1500
STE-20D271KQ	175	225	270(243-297)	455	100	10000	6500	126	1.0	1300
STE-20D301KQ	190	250	300(270-330)	500	100	10000	6500	133	1.0	1300
STE-20D331KQ	210	275	330(297-363)	550	100	10000	6500	140	1.0	1100
STE-20D361KQ	230	300	360(324-396)	595	100	10000	6500	168	1.0	1100
STE-20D391KQ	250	320	390(351-429)	650	100	10000	6500	182	1.0	1100
STE-20D431KQ	275	350	430(387-473)	710	100	10000	6500	196	1.0	1000
STE-20D471KQ	300	385	470(423-517)	775	100	10000	6500	210	1.0	900
STE-20D511KQ	320	415	510(459-561)	845	100	10000	6500	210	1.0	800
STE-20D561KQ	350	460	560(504-616)	925	100	10000	6500	210	1.0	710
STE-20D621KQ	385	505	620(558-682)	1025	100	10000	6500	224	1.0	700
STE-20D681KQ	420	560	680(612-748)	1120	100	10000	6500	224	1.0	650
STE-20D751KQ	460	615	750(675-825)	1240	100	10000	6500	266	1.0	600
STE-20D821KQ	510	670	820(738-902)	1355	100	10000	6500	266	1.0	530
STE-20D911KQ	550	745	910(819-1001)	1500	100	10000	6500	280	1.0	500
STE-20D102KQ	625	825	1000(900-1100)	1650	100	10000	6500	280	1.0	450

外形尺寸 (mm)和安规认证



10D-Q 系列

规格	尺寸 (mm)				安规认证			
	D Max.	T Max.	F ±0.5	d±0.05	CQC	VDE	UL	cUL
STE-10D391KQ	14.0	6.0	7.5	0.7	√	√	√	√
STE-10D431KQ	14.0	6.5	7.5	0.7	√	√	√	√
STE-10D471KQ	14.0	6.5	7.5	0.7	√	√	√	√
STE-10D511KQ	14.0	7.0	7.5	0.7	√	√	√	√
STE-10D561KQ	14.0	7.0	7.5	0.7	√	√	√	√
STE-10D621KQ	14.0	7.5	7.5	0.7	√	√	√	√
STE-10D681KQ	14.0	8.0	7.5	0.7	√	√	√	√
STE-10D751KQ	14.0	8.0	7.5	0.7	√	√	√	√
STE-10D821KQ	14.0	8.5	7.5	0.7	√	√	√	√
STE-10D911KQ	14.0	9.0	7.5	0.7	√	√	√	√
STE-10D102KQ	14.0	9.5	7.5	0.7	√	√	√	√






14D-Q 系列

规格	尺寸 (mm)				安规认证			
	D Max.	T Max.	F ±0.5	d±0.05	CQC	VDE	UL	cUL
STE-14D820KQ	16.5	4.5	7.5	0.7	√	√	√	√
STE-14D101KQ	16.5	4.5	7.5	0.7	√	√	√	√
STE-14D121KQ	16.5	4.5	7.5	0.7	√	√	√	√
STE-14D151KQ	16.5	5.0	7.5	0.7	√	√	√	√
STE-14D181KQ	16.5	5.0	7.5	0.7	√	√	√	√
STE-14D201KQ	16.5	5.0	7.5	0.7	√	√	√	√
STE-14D221KQ	16.5	5.5	7.5	0.7	√	√	√	√
STE-14D241KQ	16.5	5.0	7.5	0.7	√	√	√	√
STE-14D271KQ	16.5	5.0	7.5	0.7	√	√	√	√
STE-14D301KQ	16.5	5.0	7.5	0.7	√	√	√	√
STE-14D331KQ	16.5	5.5	7.5	0.7	√	√	√	√
STE-14D361KQ	16.5	5.5	7.5	0.7	√	√	√	√
STE-14D391KQ	16.5	6.0	7.5	0.7	√	√	√	√
STE-14D431KQ	16.5	6.0	7.5	0.7	√	√	√	√
STE-14D471KQ	16.5	6.5	7.5	0.7	√	√	√	√
STE-14D511KQ	16.5	6.5	7.5	0.7	√	√	√	√
STE-14D561KQ	16.5	7.0	7.5	0.7	√	√	√	√
STE-14D621KQ	16.5	7.0	7.5	0.7	√	√	√	√
STE-14D681KQ	16.5	7.5	7.5	0.7	√	√	√	√
STE-14D751KQ	16.5	8.0	7.5	0.7	√	√	√	√
STE-14D821KQ	16.5	8.5	7.5	0.7	√	√	√	√
STE-14D911KQ	16.5	9.0	7.5	0.7	√	√	√	√
STE-14D102KQ	16.5	9.5	7.5	0.7	√	√	√	√

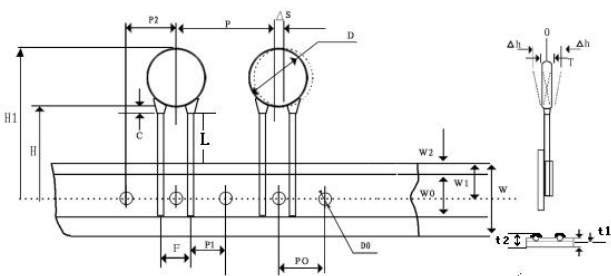
20D-Q 系列

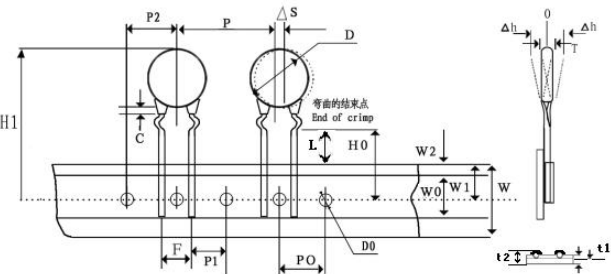
规格	尺寸 (mm)					安规认证			
	D Max.	T Max.	F ±0.5	d±0.05		CQC	VDE	UL	cUL
				直脚脚型	弯脚脚型				
STE-20D820KQ	21.0	4.5	10.0	1.0	0.8	√	√	√	√
STE-20D101KQ	21.0	5.0	10.0	1.0	0.8	√	√	√	√
STE-20D121KQ	21.0	5.0	10.0	1.0	0.8	√	√	√	√
STE-20D151KQ	21.0	5.5	10.0	1.0	0.8	√	√	√	√
STE-20D181KQ	21.0	5.5	10.0	1.0	0.8	√	√	√	√
STE-20D201KQ	21.0	5.5	10.0	1.0	0.8	√	√	√	√
STE-20D221KQ	21.0	6.0	10.0	1.0	0.8	√	√	√	√
STE-20D241KQ	21.0	5.5	10.0	1.0	0.8	√	√	√	√
STE-20D271KQ	21.0	6.0	10.0	1.0	0.8	√	√	√	√
STE-20D301KQ	21.0	6.0	10.0	1.0	0.8	√	√	√	√
STE-20D331KQ	21.0	6.0	10.0	1.0	0.8	√	√	√	√
STE-20D361KQ	21.0	6.0	10.0	1.0	0.8	√	√	√	√
STE-20D391KQ	21.0	6.5	10.0	1.0	0.8	√	√	√	√
STE-20D431KQ	21.0	6.5	10.0	1.0	0.8	√	√	√	√
STE-20D471KQ	21.0	7.0	10.0	1.0	0.8	√	√	√	√
STE-20D511KQ	21.0	7.0	10.0	1.0	0.8	√	√	√	√
STE-20D561KQ	21.0	7.5	10.0	1.0	0.8	√	√	√	√
STE-20D621KQ	21.0	7.5	10.0	1.0	0.8	√	√	√	√
STE-20D681KQ	21.0	8.0	10.0	1.0	0.8	√	√	√	√
STE-20D751KQ	21.0	8.0	10.0	1.0	0.8	√	√	√	√
STE-20D821KQ	21.0	8.5	10.0	1.0	0.8	√	√	√	√
STE-20D911KQ	21.0	9.0	10.0	1.0	0.8	√	√	√	√
STE-20D102KQ	21.0	9.5	10.0	1.0	0.8	√	√	√	√

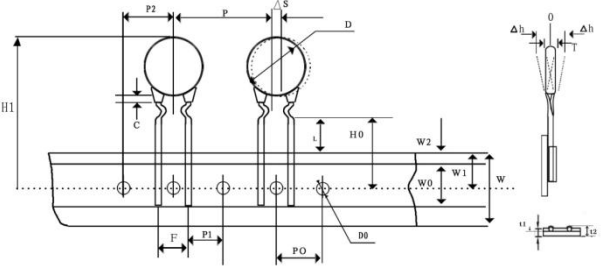
脚型、脚长说明

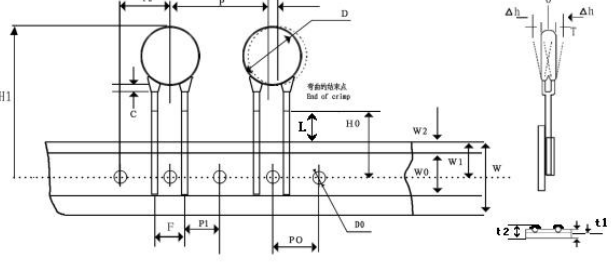
脚型	图示	脚长 L (mm)	包封脚长 C (mm)	高度 H (mm)
长直脚脚型		16.0 min	3.0 Max	/
短直脚脚型		2.5≤L<6.0: ±0.5 6.0≤L≤10: ±1.0	3.0 Max	/
单外弯脚型		2.5≤L<6.0: ±0.5 6.0≤L≤10: ±1.0	包封脚不超过弯点	5.5mm Max
单内弯脚型		2.5≤L<6.0: ±0.5 6.0≤L≤10: ±1.0	包封脚不超过弯点	5.5mm Max
前后翘脚型		2.5≤L<6.0: ±0.5 6.0≤L≤10: ±1.0	包封脚不超过弯点	4.5mm Max

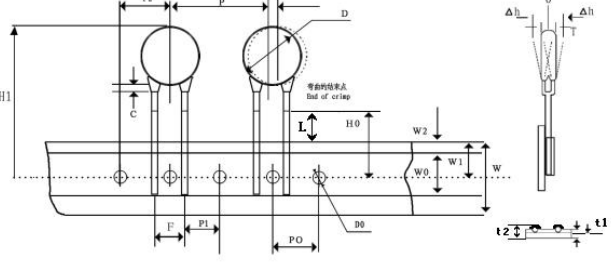
编带尺寸 (mm)

图示	代码	Po=12.7 F=7.5	Po=12.7 F=10.0
	Po	12.7±0.3	12.7±0.3
	P	25.4±1.0	25.4±1.0
	P1	8.95±0.7	7.7±0.7
	P2	12.7±1.3	12.7±1.3
	F	7.5±0.5	10.0±0.5
	Δh	0±2.0	0±2.0
	W	18.0 +1.5/-1.0	18.0 +1.5/-1.0
	Wo	10.5 Max	10.5 Max
	W1	9.0+0.75/-0.5	9.0+0.75/-0.5
	W2	3.0 Max	3.0 Max
	Do	4.0±0.2	4.0±0.2
	H	20+1.5/-1.0	20+1.5/-1.0
	Ho	16.5&17.0&19.0 +1.5/-1.0	16.5&17.0&19.0 +1.5/-1.0
	L	直脚脚型	弯脚脚型
		11.0 Max	9.0 Max
	t1	0.5±0.2	0.5±0.2
	t2	1.7 Max	1.7 Max

直脚脚型	代码	Po=12.7 F=7.5	Po=12.7 F=10.0
	Po	12.7±0.3	12.7±0.3
	P	25.4±1.0	25.4±1.0
	P1	8.95±0.7	7.7±0.7
	P2	12.7±1.3	12.7±1.3
	F	7.5±0.5	10.0±0.5
	Δh	0±2.0	0±2.0
	W	18.0 +1.5/-1.0	18.0 +1.5/-1.0
	Wo	10.5 Max	10.5 Max
	W1	9.0+0.75/-0.5	9.0+0.75/-0.5
	W2	3.0 Max	3.0 Max
	Do	4.0±0.2	4.0±0.2
	H	20+1.5/-1.0	20+1.5/-1.0
	Ho	16.5&17.0&19.0 +1.5/-1.0	16.5&17.0&19.0 +1.5/-1.0
	L	直脚脚型	弯脚脚型
		11.0 Max	9.0 Max
	t1	0.5±0.2	0.5±0.2
	t2	1.7 Max	1.7 Max

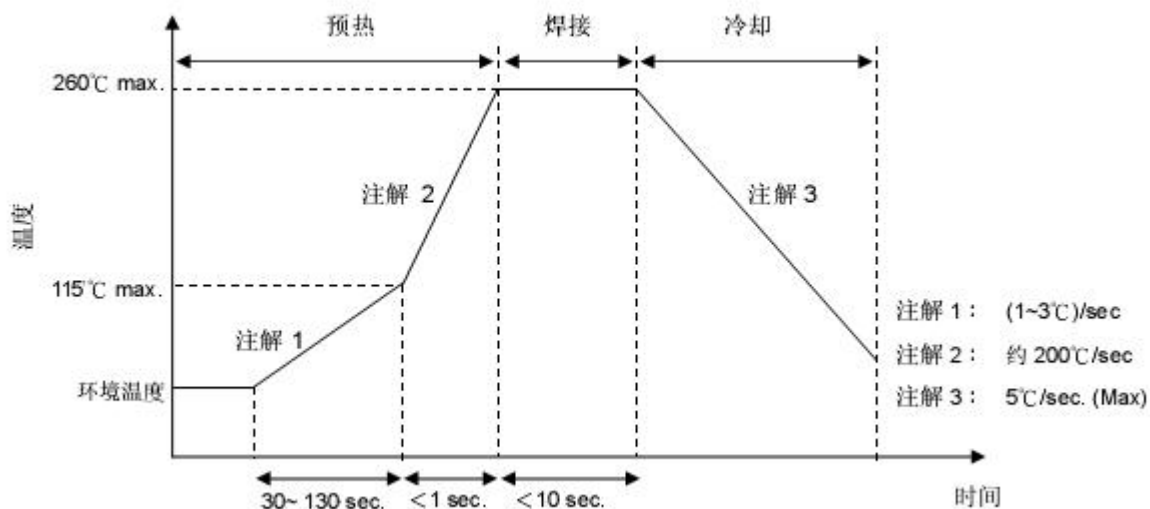
单外弯脚型	代码	Po=12.7 F=7.5	Po=12.7 F=10.0
	Po	12.7±0.3	12.7±0.3
	P	25.4±1.0	25.4±1.0
	P1	8.95±0.7	7.7±0.7
	P2	12.7±1.3	12.7±1.3
	F	7.5±0.5	10.0±0.5
	Δh	0±2.0	0±2.0
	W	18.0 +1.5/-1.0	18.0 +1.5/-1.0
	Wo	10.5 Max	10.5 Max
	W1	9.0+0.75/-0.5	9.0+0.75/-0.5
	W2	3.0 Max	3.0 Max
	Do	4.0±0.2	4.0±0.2
	H	20+1.5/-1.0	20+1.5/-1.0
	Ho	16.5&17.0&19.0 +1.5/-1.0	16.5&17.0&19.0 +1.5/-1.0
	L	直脚脚型	弯脚脚型
		11.0 Max	9.0 Max
	t1	0.5±0.2	0.5±0.2
	t2	1.7 Max	1.7 Max

单内弯脚型	代码	Po=12.7 F=7.5	Po=12.7 F=10.0
	Po	12.7±0.3	12.7±0.3
	P	25.4±1.0	25.4±1.0
	P1	8.95±0.7	7.7±0.7
	P2	12.7±1.3	12.7±1.3
	F	7.5±0.5	10.0±0.5
	Δh	0±2.0	0±2.0
	W	18.0 +1.5/-1.0	18.0 +1.5/-1.0
	Wo	10.5 Max	10.5 Max
	W1	9.0+0.75/-0.5	9.0+0.75/-0.5
	W2	3.0 Max	3.0 Max
	Do	4.0±0.2	4.0±0.2
	H	20+1.5/-1.0	20+1.5/-1.0
	Ho	16.5&17.0&19.0 +1.5/-1.0	16.5&17.0&19.0 +1.5/-1.0
	L	直脚脚型	弯脚脚型
		11.0 Max	9.0 Max
	t1	0.5±0.2	0.5±0.2
	t2	1.7 Max	1.7 Max

前后翘脚型	代码	Po=12.7 F=7.5	Po=12.7 F=10.0
	Po	12.7±0.3	12.7±0.3
	P	25.4±1.0	25.4±1.0
	P1	8.95±0.7	7.7±0.7
	P2	12.7±1.3	12.7±1.3
	F	7.5±0.5	10.0±0.5
	Δh	0±2.0	0±2.0
	W	18.0 +1.5/-1.0	18.0 +1.5/-1.0
	Wo	10.5 Max	10.5 Max
	W1	9.0+0.75/-0.5	9.0+0.75/-0.5
	W2	3.0 Max	3.0 Max
	Do	4.0±0.2	4.0±0.2
	H	20+1.5/-1.0	20+1.5/-1.0
	Ho	16.5&17.0&19.0 +1.5/-1.0	16.5&17.0&19.0 +1.5/-1.0
	L	直脚脚型	弯脚脚型
		11.0 Max	9.0 Max
	t1	0.5±0.2	0.5±0.2
	t2	1.7 Max	1.7 Max

焊接条件:

波峰焊曲线



烙铁重工焊接条件

项目	条件
烙铁头部温度	350°C (max.)
焊接时间	3 sec (max.)
焊接位置与涂装层距离	2 mm (min.)

储存条件

- 储存温度: $\leq 35^{\circ}\text{C}$ 。
- 相对湿度: $\leq 70\% \text{ RH}$ 。
- 不要将本产品存放在有腐蚀性气体或阳光直接照射的环境中保管。
- 储存期限: 12 个月。